

FERM[®]

POWER SINCE 1965



FERM POWER-FS

CATALOG

HEAVY DUTY



POWER TO CREATE

DESIGNED AND DEVELOPED IN THE NETHERLANDS 



POWER-FS

ANGLE GRINDER

750W-100MM AGM1064S

Features

- Powerful and compact angle grinder with soft grip
- Paddle switch; safe and easy-to-handle
- Quick release protection guard
- Spindle lock for easy disc exchange
- 3-position side handle with soft grip
- 3m rubber cable

Specifications

| | |
|---------------|-----------------------|
| Mains voltage | 230 - 240V~ |
| Frequency | 50Hz |
| Power input | 750W |
| No load speed | 12000 /min |
| Disc diameter | 100 mm |
| Spindle | M10 |
| Includes | Side handle - Spanner |

Logistic information


| | |
|-------------------------|---------------|
| EAN code | 8717479034864 |
| Quantity per export box | 4 pcs |
| Quantity on pallet | 192 pcs |
| Quantity per FCL 20 ft. | 4464 pcs |
| Quantity per FCL 40 ft. | 9088 pcs |
| Weight (kg) | 2.345 |

Only available at FOB conditions. For more information please contact FERMM.



SCAN AND WATCH
THE PRODUCT VIDEOS
WWW.FERMM.COM



DESIGNED AND DEVELOPED IN **THE NETHERLANDS** 



POWER-FS

ANGLE GRINDER

750W-115MM AGM1060S

Features

- Powerful and compact angle grinder with soft grip
- Paddle switch; safe and easy-to-handle
- Quick release protection guard
- Spindle lock for easy disc exchange
- 3-position side handle with soft grip
- 3m rubber cable

Accessories

| | |
|-------------------------------------|---------|
| Diamond Cutting Disc, 115 mm open | AGA1018 |
| Diamond Cutting Disc, 115 mm closed | AGA1020 |

Specifications

| | |
|---------------|-----------------------|
| Mains voltage | 230 - 240V~ |
| Frequency | 50Hz |
| Power input | 750W |
| No load speed | 12000 /min |
| Disc diameter | 115 mm |
| Spindle | M14 |
| Includes | Side handle - Spanner |

Logistic information

| | |
|-------------------------|---------------|
| EAN code | 8717479003259 |
| Quantity per export box | 4 pcs |
| Quantity on pallet | 192 pcs |
| Quantity per FCL 20 ft. | 4464 pcs |
| Quantity per FCL 40 ft. | 9088 pcs |
| Weight (kg) | 2.640 |

SCAN AND WATCH
THE PRODUCT VIDEOS
WWW.FERM.COM



DESIGNED AND DEVELOPED IN **THE NETHERLANDS** 



POWER-FS

ANGLE GRINDER

1100W-115MM AGM1065S

Features

- Powerful and slim angle grinder with soft grip
- Lock-off safety switch
- Quick release protection guard
- Spindle lock for easy disc exchange
- 3-position side handle with soft grip
- 3m rubber cable

Accessories

- | | |
|-------------------------------------|---------|
| Diamond Cutting Disc, 115 mm open | AGA1018 |
| Diamond Cutting Disc, 115 mm closed | AGA1020 |

Specifications

| | |
|---------------|--|
| Mains voltage | 230 - 240V~ |
| Frequency | 50Hz |
| Power input | 1100W |
| No load speed | 12000 /min |
| Disc diameter | 115 mm |
| Spindle | M14 |
| Includes | Side handle - Spanner - Set of carbon brushes |

Logistic information

| | |
|-------------------------|---------------|
| EAN code | 8717479034871 |
| Quantity per export box | 4 pcs |
| Quantity on pallet | 144 pcs |
| Quantity per FCL 20 ft. | 3360 pcs |
| Quantity per FCL 40 ft. | 6836 pcs |
| Weight (kg) | 2.960 |

Only available at FOB conditions. For more information please contact FERM.

SCAN AND WATCH
THE PRODUCT VIDEOS
WWW.FERM.COM





POWER-FS

ANGLE GRINDER

900W-125MM AGM1061S

Features

- Powerful and compact angle grinder with soft grip
- Paddle switch; safe and easy-to-handle
- Quick release protection guard
- Spindle lock for easy disc exchange
- 3-position side handle with soft grip
- 3m rubber cable

Accessories

Diamond Cutting Disc, 125 mm open AGA1019
Diamond Cutting Disc, 125 mm closed AGA1021

Specifications

| | |
|---------------|-----------------------|
| Mains voltage | 230 - 240V~ |
| Frequency | 50Hz |
| Power input | 900W |
| No load speed | 12000 /min |
| Disc diameter | 125 mm |
| Spindle | M14 |
| Includes | Side handle - Spanner |

Logistic information

| | |
|-------------------------|---------------|
| EAN code | 8717479003266 |
| Quantity per export box | 4 pcs |
| Quantity on pallet | 192 pcs |
| Quantity per FCL 20 ft. | 4464 pcs |
| Quantity per FCL 40 ft. | 9088 pcs |
| Weight (kg) | 2.810 |



SCAN AND WATCH
THE PRODUCT VIDEOS
WWW.FERM.COM



DESIGNED AND DEVELOPED IN **THE NETHERLANDS** 



POWER-FS

ANGLE GRINDER

1100W-125MM AGM1062S

Features

- Powerful and slim angle grinder with soft grip
- Lock-off safety switch
- Quick release protection guard
- Spindle lock for easy disc exchange
- 3-position side handle with soft grip
- 3m rubber cable

Accessories

Diamond Cutting Disc, 125 mm open AGA1019
Diamond Cutting Disc, 125 mm closed AGA1021

Specifications

| | |
|---------------|--|
| Mains voltage | 230 - 240V~ |
| Frequency | 50Hz |
| Power input | 1100W |
| No load speed | 12000 /min |
| Disc diameter | 125 mm |
| Spindle | M14 |
| Includes | Side handle - Spanner - Set of carbon brushes |

Logistic information

| | |
|-------------------------|---------------|
| EAN code | 8717479003273 |
| Quantity per export box | 4 pcs |
| Quantity on pallet | 144 pcs |
| Quantity per FCL 20 ft. | 3360 pcs |
| Quantity per FCL 40 ft. | 6836 pcs |
| Weight (kg) | 3.010 |

SCAN AND WATCH
THE PRODUCT VIDEOS
WWW.FERM.COM



DESIGNED AND DEVELOPED IN **THE NETHERLANDS**



POWER-FS

ANGLE GRINDER

2000W-180MM AGM1066S

Features

- Heavy duty 2000W angle grinder with soft grip
- Soft start to limit start-up current and reduce kick back
- Lock-off safety switch
- Spindle lock for easy disc exchange
- 3-position side handle with soft grip
- 3m rubber cable

Specifications

| | |
|---------------|---|
| Mains voltage | 230 - 240V~ |
| Frequency | 50Hz |
| Power input | 2000W |
| No load speed | 8000 /min |
| Disc diameter | 180 mm |
| Spindle | M14 |
| Includes | Side handle - Spanner - Hex key - Set of carbon brushes |

Logistic information

| | |
|-------------------------|---------------|
| EAN code | 8717479034888 |
| Quantity per export box | 2 pcs |
| Quantity on pallet | 80 pcs |
| Quantity per FCL 20 ft. | 1650 pcs |
| Quantity per FCL 40 ft. | 3356 pcs |
| Weight (kg) | 5.240 |

Only available at FOB conditions. For more information please contact FERM.



SCAN AND WATCH
THE PRODUCT VIDEOS
WWW.FERM.COM





POWER-FS

ANGLE GRINDER

2000W-230MM AGM1063S

Features

- Heavy duty 2000W angle grinder with soft grip
- Soft start to limit start-up current and reduce kick back
- Lock-off safety switch
- Spindle lock for easy disc exchange
- 3-position side handle with soft grip
- 3m rubber cable

Specifications

| | |
|---------------|---|
| Mains voltage | 230 - 240V~ |
| Frequency | 50Hz |
| Power input | 2000W |
| No load speed | 6600 /min |
| Disc diameter | 230 mm |
| Spindle | M14 |
| Includes | Side handle - Spanner - Hex key - Set of carbon brushes |

Logistic information

| | |
|-------------------------|---------------|
| EAN code | 8717479003280 |
| Quantity per export box | 2 pcs |
| Quantity on pallet | 80 pcs |
| Quantity per FCL 20 ft. | 1650 pcs |
| Quantity per FCL 40 ft. | 3356 pcs |
| Weight (kg) | 5.520 |

SCAN AND WATCH
THE PRODUCT VIDEOS
WWW.FERM.COM





POWER-FS

LI-ION SCREWDRIVER

3.6V-1.3Ah CDM1108S

Features

- 7Nm torque
- Li-Ion technology; always ready to use, 50% more battery performance
- USB charger
- LED worklight
- Ergonomic design with soft grip
- Robust storage case included

Specifications

| | |
|-----------------------|--|
| Charger mains voltage | 100 - 240V~ |
| Charger frequency | 50Hz |
| Charger connection | Mains / USB |
| Machine voltage | 3.6V - 1.3Ah |
| Battery type | Li-Ion |
| No load speed | 180 /min |
| Max. screw capacity | 5 mm |
| Max. torque | 7 Nm |
| Spindle lock | Yes |
| Battery charging time | 2-3 hours |
| Includes | USB charger adaptor - USB charging cable - 1 Magnetic bit holder - 10 Screwdriver bits (S2) - Storage Case |

Logistic information

| | |
|-------------------------|---------------|
| EAN code | 8717479033188 |
| Quantity per export box | 5 pcs |
| Quantity on pallet | 280 pcs |
| Quantity per FCL 20 ft. | 6320 pcs |
| Quantity per FCL 40 ft. | 12865 pcs |
| Weight (kg) | 1.012 |

SCAN AND WATCH
THE PRODUCT VIDEOS
WWW.FERM.COM



DESIGNED AND DEVELOPED IN **THE NETHERLANDS** 



POWER-FS

CORDLESS LI-ION DRILL

10.8V-1.3Ah CDM112S

Features

- Compact machine with 30Nm of torque
- Li-Ion technology; always ready to use, 50% more battery performance
- 2 mechanical speed settings
- Variable electronic speed and 21 torque settings
- LED worklight, battery level indication and belt hook
- 45 minutes quick charger
- Robust storage case included

Accessories

- 10.8V battery Li-Ion 1.3Ah
- Drill/bit set, 27pcs
- Drill set, 16pcs
- Flat wood bit set, 7pcs

- CDA1075S
- CDA1035
- CDA1062
- CDA1063

Specifications

- Charger mains voltage 100 - 240V~
- Charger frequency 50Hz
- Machine voltage 10.8V - 1.3Ah
- Battery type Li-Ion
- Charging time 45 minutes
- Number of gears 2
- No load speed position 1 0-350 /min
- No load speed position 2 0-1200 /min
- Max torque 30 Nm
- Number of torque settings 20 + drill
- Chuck capacity 0.8 -10 mm
- Includes 2 10.8V Li-Ion batteries - Quick charger - 2 Screw driver bits - Storage case


Logistic information

- EAN code 8717479033812
- Quantity per export box 4 pcs
- Quantity on pallet 80 pcs
- Quantity per FCL 20 ft. 2152 pcs
- Quantity per FCL 40 ft. 4380 pcs
- Weight (kg) 3.065



SCAN AND WATCH
THE PRODUCT VIDEOS
WWW.FERM.COM



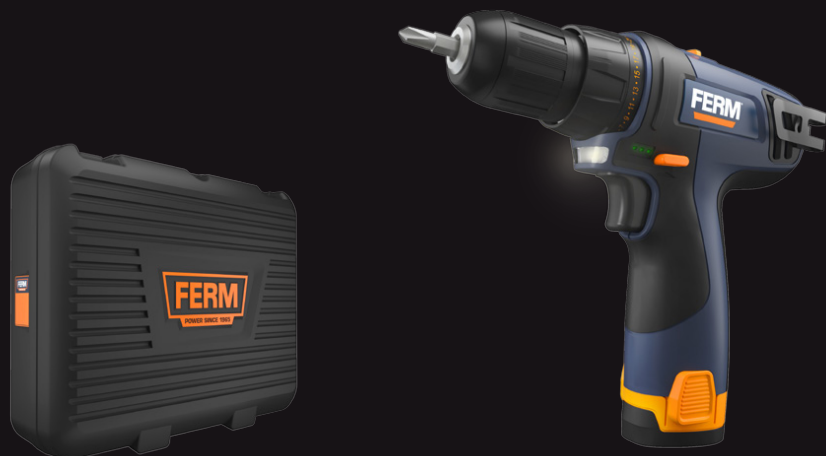

POWER-FS

CORDLESS LI-ION DRILL

10.8V-1.3Ah CDM1109S

Features

- Compact machine with 30Nm of torque
- Li-Ion technology; always ready to use, 50% more battery performance
- 2 mechanical speed settings
- Variable electronic speed and 21 torque settings
- LED worklight, battery level indication and belt hook
- 45 minutes quick charger
- Robust storage case included

Accessories

- | | |
|----------------------------|----------|
| 10.8V battery Li-Ion 1.3Ah | CDA1075S |
| Drill/bit set, 27pcs | CDA1035 |
| Drill set, 16pcs | CDA1062 |
| Flat wood bit set, 7pcs | CDA1063 |

Specifications

| | |
|---------------------------|---|
| Charger mains voltage | 100 - 240V~ |
| Charger frequency | 50Hz |
| Machine voltage | 10.8V - 1.3Ah |
| Battery type | Li-Ion |
| Charging time | 45 minutes |
| Number of gears | 2 |
| No load speed position 1 | 0-350 /min |
| No load speed position 2 | 0-1200 /min |
| Max torque | 30 Nm |
| Number of torque settings | 20 + drill |
| Chuck capacity | 0.8 -10 mm |
| Includes | 10.8V Li-Ion battery - Quick charger - 2 Screw driver bits - Storage case |

Logistic information

| | |
|-------------------------|---------------|
| EAN code | 8717479033195 |
| Quantity per export box | 4 pcs |
| Quantity on pallet | 80 pcs |
| Quantity per FCL 20 ft. | 2152 pcs |
| Quantity per FCL 40 ft. | 4380 pcs |
| Weight (kg) | 2.897 |

Only available at FOB conditions. For more information please contact FERM.

SCAN AND WATCH
THE PRODUCT VIDEOS
WWW.FERM.COM





POWER-FS

CORDLESS LI-ION DRILL

14.4V-1.5Ah CDM1113S

Features

- 38 Nm torque
- Li-Ion technology; always ready to use, 50% more battery performance
- 2 mechanical speed settings
- Variable electronic speed and 24 torque settings
- Metal single-sleeve chuck with lock-function
- LED worklight, battery level indication and belt hook
- 1 hour quick charger
- Robust storage case included

Accessories

- 14.4V battery Li-Ion 1.5Ah
- Drill/bit set, 27pcs
- Drill set, 16pcs
- Flat wood bit set, 7pcs

- CDA1076S
- CDA1035
- CDA1062
- CDA1063

Specifications

- | | |
|---------------------------|---|
| Charger mains voltage | 230 - 240V~ |
| Charger frequency | 50Hz |
| Machine voltage | 14.4V - 1.5Ah |
| Battery type | Li-Ion |
| Charging time | 60 minutes |
| Number of gears | 2 |
| No load speed position 1 | 0-400 /min |
| No load speed position 2 | 0-1400 /min |
| Max torque | 38 Nm |
| Number of torque settings | 23 + drill |
| Chuck capacity | 1-10 mm |
| Includes | 2 14.4V Li-Ion batteries - Quick charger - 2 double sided bits - Storage case |

Logistic information

- | | |
|-------------------------|---------------|
| EAN code | 8717479033829 |
| Quantity per export box | 4 pcs |
| Quantity on pallet | 80 pcs |
| Quantity per FCL 20 ft. | 2040 pcs |
| Quantity per FCL 40 ft. | 4148 pcs |
| Weight (kg) | 3.790 |



SCAN AND WATCH
THE PRODUCT VIDEOS
WWW.FERMI.COM



DESIGNED AND DEVELOPED IN THE NETHERLANDS





POWER-FS

CORDLESS LI-ION DRILL

14.4V-1.5Ah CDM110S

Features

- 38 Nm torque
- Li-Ion technology; always ready to use, 50% more battery performance
- 2 mechanical speed settings
- Variable electronic speed and 24 torque settings
- Metal single-sleeve chuck with lock-function
- LED worklight, battery level indication and belt hook
- 1 hour quick charger
- Robust storage case included

Accessories

- 14.4V battery Li-Ion 1.5Ah
- Drill/bit set, 27pcs
- Drill set, 16pcs
- Flat wood bit set, 7pcs

- CDA1076S
- CDA1035
- CDA1062
- CDA1063

Specifications

| | |
|---------------------------|---|
| Charger mains voltage | 230 - 240V~ |
| Charger frequency | 50Hz |
| Machine voltage | 14.4V - 1.5Ah |
| Battery type | Li-Ion |
| Charging time | 60 minutes |
| Number of gears | 2 |
| No load speed position 1 | 0-400 /min |
| No load speed position 2 | 0-1400 /min |
| Max torque | 38 Nm |
| Number of torque settings | 23 + drill |
| Chuck capacity | 1-10 mm |
| Includes | 14.4V Li-Ion battery - Quick charger - 2 double sided bits - Storage case |

Logistic information

| | |
|-------------------------|---------------|
| EAN code | 8717479033201 |
| Quantity per export box | 4 pcs |
| Quantity on pallet | 80 pcs |
| Quantity per FCL 20 ft. | 2040 pcs |
| Quantity per FCL 40 ft. | 4148 pcs |
| Weight (kg) | 3.464 |

Only available at FOB conditions. For more information please contact FERM.

SCAN AND WATCH
THE PRODUCT VIDEOS
WWW.FERM.COM





POWER-FS

CORDLESS LI-ION DRILL

18V-1.5Ah CDM1114S

Features

- 44 Nm torque
- Li-Ion technology; always ready to use, 50% more battery performance
- 2 mechanical speed settings
- Variable electronic speed and 24 torque settings
- Metal single-sleeve chuck with lock-function
- LED worklight, battery level indication and belt hook
- 1 hour quick charger
- Robust storage case included

Accessories

18V battery Li-Ion 1.5Ah
 Drill/bit set, 27pcs
 Drill set, 16pcs
 Flat wood bit set, 7pcs

CDA1077S
 CDA1035
 CDA1062
 CDA1063

Specifications

| | |
|---------------------------|---|
| Charger mains voltage | 230 - 240V~ |
| Charger frequency | 50Hz |
| Machine voltage | 18V - 1.5Ah |
| Battery type | Li-Ion |
| Charging time | 60 minutes |
| Number of gears | 2 |
| No load speed position 1 | 0-400 /min |
| No load speed position 2 | 0-1400 /min |
| Max torque | 44 Nm |
| Number of torque settings | 23 + drill |
| Chuck capacity | 1-10 mm |
| Includes | 2 18V Li-Ion batteries - Quick charger - 2 double sided bits - Storage case |

Logistic information

| | |
|-------------------------|---------------|
| EAN code | 8717479033836 |
| Quantity per export box | 4 pcs |
| Quantity on pallet | 80 pcs |
| Quantity per FCL 20 ft. | 2040 pcs |
| Quantity per FCL 40 ft. | 4148 pcs |
| Weight (kg) | 3.895 |



SCAN AND WATCH
 THE PRODUCT VIDEOS
WWW.FERM.COM





POWER-FS

CORDLESS LI-ION DRILL

18V-1.5Ah CDM1111S

Features

- 44 Nm torque
- Li-Ion technology; always ready to use, 50% more battery performance
- 2 mechanical speed settings
- Variable electronic speed and 24 torque settings
- Metal single-sleeve chuck with lock-function
- LED worklight, battery level indication and belt hook
- 1 hour quick charger
- Robust storage case included

Accessories

- 18V battery Li-Ion 1.5Ah
- Drill/bit set, 27pcs
- Drill set, 16pcs
- Flat wood bit set, 7pcs

- CDA1077S
- CDA1035
- CDA1062
- CDA1063

Specifications

| | |
|---------------------------|---|
| Charger mains voltage | 230 - 240V~ |
| Charger frequency | 50Hz |
| Machine voltage | 18V - 1.5Ah |
| Battery type | Li-Ion |
| Charging time | 60 minutes |
| Number of gears | 2 |
| No load speed position 1 | 0-400 /min |
| No load speed position 2 | 0-1400 /min |
| Max torque | 44 Nm |
| Number of torque settings | 23 + drill |
| Chuck capacity | 1-10 mm |
| Includes | 18V Li-Ion battery - Quick charger - 2 double sided bits - Storage case |

Logistic information

| | |
|-------------------------|---------------|
| EAN code | 8717479033218 |
| Quantity per export box | 4 pcs |
| Quantity on pallet | 80 pcs |
| Quantity per FCL 20 ft. | 2040 pcs |
| Quantity per FCL 40 ft. | 4148 pcs |
| Weight (kg) | 3.528 |

Only available at FOB conditions. For more information please contact FERM.

SCAN AND WATCH
THE PRODUCT VIDEOS
WWW.FERM.COM



DESIGNED AND DEVELOPED IN **THE NETHERLANDS**



POWER-FS

ROTARY HAMMER

600W HDM1026S

Features

- 1.8 Joule impact energy; drilling in concrete and light demolition jobs
- 4 functions: drilling, hammer drilling, chiselling, free rotation chiselling
- Electronic speed control
- Soft grip handles
- Robust storage case included
- 3m rubber cable

Specifications

| | |
|---------------------------------|--|
| Mains voltage | 230 - 240V~ |
| Frequency | 50Hz |
| Power input | 600W |
| No load speed | 0 - 1100 /min |
| No load impact rate | 0 - 5800 /min |
| Max. drill capacity in concrete | 20 mm |
| Max. drill capacity in steel | 13 mm |
| Impact energy | 1.8 Joule |
| Chuck | SDS-plus |
| Includes | Side handle - Depth limiter - 3 SDS-PLUS drills (6, 8, 10 mm) - Flat SDS-PLUS chisel - Pointed SDS-PLUS chisel - Storage case |

Logistic information

| | |
|-------------------------|---------------|
| EAN code | 8717479033164 |
| Quantity per export box | 2 pcs |
| Quantity on pallet | 70 pcs |
| Quantity per FCL 20 ft. | 1366 pcs |
| Quantity per FCL 40 ft. | 2780 pcs |
| Weight (kg) | 5.600 |



SCAN AND WATCH
THE PRODUCT VIDEOS
WWW.FERMM.COM





POWER-FS

ROTARY HAMMER

950W HDM1027S

Features

- 2.8 Joule impact energy; drilling in concrete and several demolition jobs
- 4 functions: drilling, hammer drilling, chiselling, free rotation chiselling
- Electronic speed control
- Soft grip handles
- Robust storage case included
- 3m rubber cable

Specifications

| | |
|---------------------------------|--|
| Mains voltage | 230 - 240V~ |
| Frequency | 50Hz |
| Power input | 950W |
| No load speed | 0 - 960 /min |
| No load impact rate | 0 - 4550 /min |
| Max. drill capacity in concrete | 26 mm |
| Max. drill capacity in steel | 13 mm |
| Impact energy | 2.8 Joule |
| Chuck | SDS-plus |
| Includes | Side handle - Depth limiter - 3 SDS-PLUS drills (6, 8, 10 mm) - Flat SDS-PLUS chisel - Pointed SDS-PLUS chisel - Storage case |

Logistic information

| | |
|-------------------------|---------------|
| EAN code | 8717479033171 |
| Quantity per export box | 2 pcs |
| Quantity on pallet | 60 pcs |
| Quantity per FCL 20 ft. | 1282 pcs |
| Quantity per FCL 40 ft. | 2610 pcs |
| Weight (kg) | 6.460 |

SCAN AND WATCH
THE PRODUCT VIDEOS
WWW.FERM.COM





POWER-FS

IMPACT DRILL

710W PDM1036S

Features

- Powerful and compact impact drill with soft grip
- Variable speed control for material-specific working
- Adjustable side handle with metal depth limiter
- Quality chuck with lock-function
- 3m cable

Accessories

- Drill/bit set, 27pcs
- Drill set, 16pcs
- Flat wood bit set, 7pcs

CDA1035
CDA1062
CDA1063

Specifications

| | |
|---------------------------------|-----------------------------|
| Mains voltage | 230 - 240V~ |
| Frequency | 50Hz |
| Power input | 710W |
| No load speed | 0-3000 /min |
| No load impact rate | 0-48000 /min |
| Max. drill capacity in wood | 25 mm |
| Max. drill capacity in steel | 10 mm |
| Max. drill capacity in concrete | 13 mm |
| Chuck capacity | 2-13 mm |
| Includes | Side handle - Depth limiter |

Logistic information

| | |
|-------------------------|---------------|
| EAN code | 8717479033140 |
| Quantity per export box | 5 pcs |
| Quantity on pallet | 175 pcs |
| Quantity per FCL 20 ft. | 4065 pcs |
| Quantity per FCL 40 ft. | 8270 pcs |
| Weight (kg) | 2.448 |



SCAN AND WATCH
THE PRODUCT VIDEOS
WWW.FERMM.COM





POWER-FS

IMPACT DRILL

710W PDM1038S

Features

- Powerful and compact impact drill with soft grip
- Variable speed control for material-specific working
- Adjustable side handle with metal depth limiter
- Quality chuck with lock-function
- 3m cable

Accessories

| | |
|-------------------------|---------|
| Drill/bit set, 27pcs | CDA1035 |
| Drill set, 16pcs | CDA1062 |
| Flat wood bit set, 7pcs | CDA1063 |

Specifications

| | |
|---------------------------------|--|
| Mains voltage | 230 - 240V~ |
| Frequency | 50Hz |
| Power input | 710W |
| No load speed | 0-3000 /min |
| No load impact rate | 0-48000 /min |
| Max. drill capacity in wood | 25 mm |
| Max. drill capacity in steel | 10 mm |
| Max. drill capacity in concrete | 13 mm |
| Chuck capacity | 2-13 mm |
| Includes | Side handle - Depth limiter - Storage case |

Logistic information

| | |
|-------------------------|---------------|
| EAN code | 8717479035397 |
| Quantity per export box | 4 pcs |
| Quantity on pallet | 80 pcs |
| Quantity per FCL 20 ft. | 1852 pcs |
| Quantity per FCL 40 ft. | 3768 pcs |
| Weight (kg) | 3.500 |

Only available at FOB conditions. For more information please contact FERMM.

SCAN AND WATCH
THE PRODUCT VIDEOS
WWW.FERMM.COM





POWER-FS

IMPACT DRILL

1010W PDM1037S

Features

- Heavy duty impact drill with metal gear head and soft grip
- 2 mechanical speed settings and variable speed control
- Adjustable side handle with metal depth limiter
- Metal chuck with lock-function
- Robust storage case included
- 3m rubber cable

Accessories

| | |
|-------------------------|---------|
| Drill/bit set, 27pcs | CDA1035 |
| Drill set, 16pcs | CDA1062 |
| Flat wood bit set, 7pcs | CDA1063 |

Specifications

| | |
|---------------------------------|--|
| Mains voltage | 230 - 240V~ |
| Frequency | 50Hz |
| Power input | 1010W |
| No load speed (1) | 0-1000 /min |
| No load speed (2) | 0-3000 /min |
| No load impact rate (1) | 0-16000 /min |
| No load impact rate (2) | 0-48000 /min |
| Max. drill capacity in wood | 40 mm |
| Max. drill capacity in steel | 13 mm |
| Max. drill capacity in concrete | 16 mm |
| Chuck capacity | 1.5-13 mm |
| Includes | Side handle - Depth limiter - Storage case |

Logistic information

| | |
|-------------------------|---------------|
| EAN code | 8717479033157 |
| Quantity per export box | 2 pcs |
| Quantity on pallet | 60 pcs |
| Quantity per FCL 20 ft. | 1362 pcs |
| Quantity per FCL 40 ft. | 2770 pcs |
| Weight (kg) | 5,230 |



SCAN AND WATCH
THE PRODUCT VIDEOS
WWW.FERRO.COM



General conditions

- At any time and without prior notice, FERM may improve or change it's products.
- Misprints reserved.
- The general terms of sale and delivery apply to all FERM deliveries.





Headquarters Zwolle



Reception



Warehouse



Engineering and design



Training room



Quality control

FERM POWER-FS

HEAVY DUTY

WWW.FERM.COM